

Polizor pneumatic unghiular

1517S



Profile



Caracteristicile produsului


- viteza de rotatie 4500 rotatii/minut
- Presiunea maxima de aer comprimat: 6, 2 Bar
- consum de aer comprimat 340 l/min
- Racord de aer 1/4"
- racord filetat 5/8"

Avantaje:

- scula mica si compacta
- utilizabil atat pentru mana dreapta cat si pentru mana stanga
- maner interschimbabil
- maner rotitor

Utilizare

- curatirea sudurii
- curatirea zunelor ascutite
- curatirea suprafetelor mici accidentate

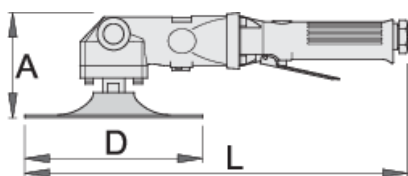

L

A

D



617729

375

100

175

2610

* Imaginea produsului este simbolica.Toate dimensiunile sunt exprimate în mm,greutatea în grame.

0 (pictures)



Photo (pictures)



Accessories



Cuplaj, partea tata



Cuplaj, partea tata



Cuplaj, partea mama



Cuplaj, partea mama



Filtru regulator si ungator pneumatic 3/8"



Filtru regulator si ungator pneumatic 1/2"



Furtun pneumatic elicoidal

Safety tips



- The pressure in the tool during the operation has to be at least 6.2 bar for the tool to work properly.
- Regularly clean and dry the air filters and inlet air supply.
- Always use clean and dry air with the correct mixture of oil, for maximum tool life.
- Check the joints and ensure that the tubes and other equipment are not damaged before use.
- All tools should be gently oiled prior to being stored.
- Always store pneumatic tools in dry places away from water.
- Always use original spare parts.
- Repairs can be performed only by authorised staff people authorised by Unior d.d.



- Always disconnect tools not in use from the air supply.